

TUBI Grease Universal

Universal grease for industry and motor vehicles, with excellent properties that make it usable for everything from fast rolling surfaces to high-load gliding surfaces in cylinders and presses.

Lubricant for most areas within workshops, industry and automotive

Grease for lubrication of wheel bearings and many other details within vehicles. Thickened by a lithium soap and mechanically stable. Has very good anti-corrosive properties and has a non-corrosive impact on non-iron metals (such as copper, bronze and babbitt) in bearings.

Technical specifications

Typical analysis data refers to the normal analysed values that the product shows during a longer period.

Properties

Colour: Yellow

NLGI: no. 2


Penetration, worked: 280

Base oil viscosity: 200/14 t 40°C/100°C mm²/s (cSt)

Drop point: 180 °C

Operating temperature: -30 to +140 °C

Thickener Lithium soap

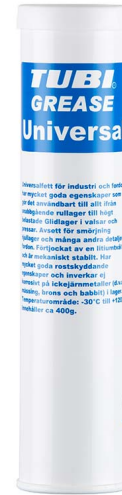

Specifications and approvals

DIN 51 502: KP 2 K-30

ISO 6743-09: ISO-L-XCCEB2

MAN 283 - MB 267

Tests

R2F, test A (120°C), B (150°C), AF: All three approved

SKF Emcor test, fresh water/salt water: Both tests resulted in 0/0