


TUBI Grease Långtid (Durable)

Extreme-pressure grease based on the highest quality mineral oil, giving it superior lubrication properties, high mechanic stability, outstanding oxidation stability and wear and corrosion protection.

The lubricant has a broad range of application making it just as usable in farming, construction, haulage and forest machinery as it is in hobby and workshop machines. Good for industrial application such as fans, vibrating bearings in dryers, release bearings and braking cylinders.

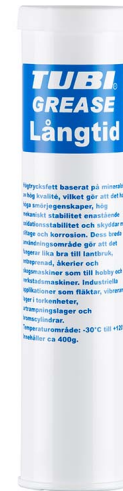

Technical specifications

Typical analysis data refers to the normal analysed values that the product shows during a longer period.

Properties

Colour: Green

NLGI: no. 2

Penetration, worked: 280

Base oil viscosity: 200/14 t 40°C/100°C mm²/s (cSt)

Drop point: 250 °C

Operating temperature: -35 to +140 °C

Thickener: Lithium complex soap

Specifications and approvals

DIN 51 502: KP 2 N-30

ISO 6743-09: ISO-L-XCDHB2

Volvo: Wheel surface grease

Tests

R2F, test A (120°C), B (150°C), AF: All three approved

SKF Emcor test, fresh water/salt water: Both tests resulted in 0/0